


NOTE: SEE PAGE 25-1 FOR ALL APPLICABLE NOTES

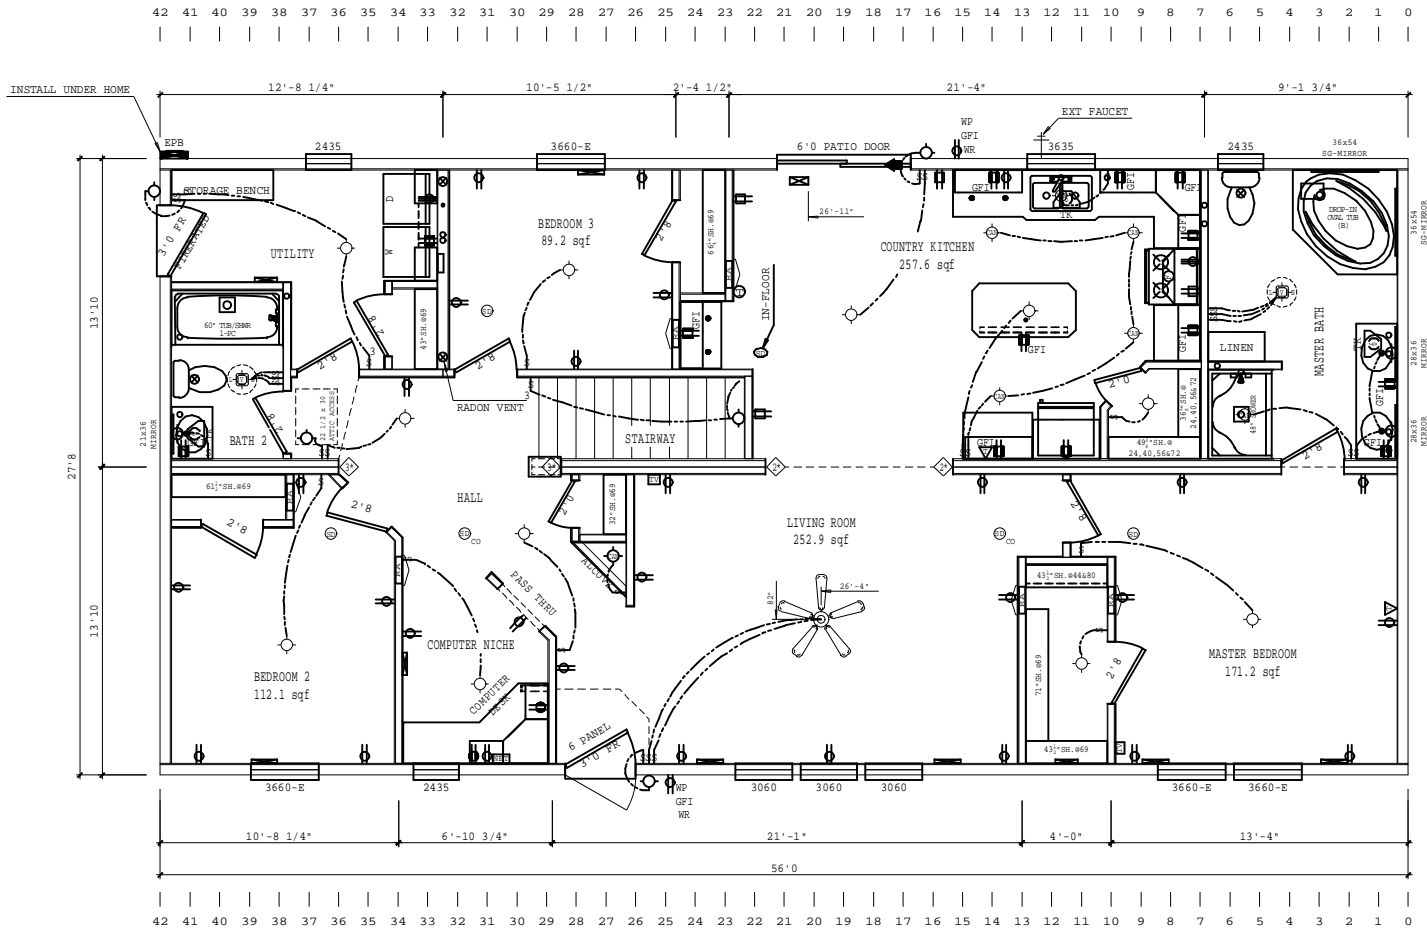

REQUIRED SHEARWALLS SEISMIC ZONE D1
 312 PLF SHEAR CAPACITY
 120" MAX. WALL HEIGHT
 132.4" MIN. LENGTH
 ALL SIDE AND END WALLS

DIAPHRAGM = PLF		DIAPHRAGM = PLF		DIAPHRAGM = PLF		DIAPHRAGM = PLF		DIAPHRAGM = PLF		DIAPHRAGM = PLF		DIAPHRAGM = PLF		DIAPHRAGM = PLF		DIAPHRAGM = PLF		DESIGN LOADS		RETURN AIR REQUIREMENTS		INDICATES REQUIRED NUMBER OF STUDS IN COLUMN				
SHEARWALL	DESIGN PLF	SHEAR AREA	JOISTS	SHEARWALL	DESIGN PLF	SHEAR AREA	JOISTS	SHEARWALL	DESIGN PLF	SHEAR AREA	JOISTS	SHEARWALL	DESIGN PLF	SHEAR AREA	JOISTS	SHEARWALL	DESIGN PLF	SHEAR AREA	JOISTS	WIND-ROOF PRF	①	②	③	④	THE * SPECIFIES THAT THERE CAN BE NO HOLES IN STUDS IN COLUMNS	
																					20"x16" GRILL REQUIRED					
																					4"x10" GRILL W/ 2 1/2" DOOR UNDERCUT					
																					DOOR(S) MUST BE UNDERCUT 2 1/2" MIN.					
																					4"x24" OR 6"x14" GRILL REQUIRED					

BRAND	SCHULT	SERIES	MD28	REVISIONS	BY	DATE	GENERAL NOTES	DRAWING TITLE	MASTER PLAN	MODEL NAME	TIMBERLAND MODULAR-364016	SQ. FT.	1549				
CMH MANUFACTURING, INC.							CEILING HEIGHT = 90.00			PLANT	954	DESCRIPTION	28X56 3BR-2BA	MODEL NO.	MR5628-402-1		
							FLOOR FRAMING SPACING = 16			DRAWN BY	CLD	ORIG. DATE	02/14/2012	DATE PRINTED	02/14/2012	SHEET NO.	1-1
							TOTAL WINDOW SQFT = 154.5										